

Dieter's

Nixie Tube Data Archive

This file is a part of Dieter's Nixie- and display tubes data archive

If you have more datasheets, articles, books, pictures or other information about Nixie tubes or other display devices please let me know.

Thank you!


Document in this file	Rodan Catalog from German Electronics Supplier "Hegener+Glaser GMBH"
Display devices in this document	CD11, CD12, CD13, CD14, CD15, CD20, CD21, CD22, CD23, CD24, CD25, CD27, CD28, CD38, CD40, CD42, CD43, CD47, CD66, CD78, GR-110, GR-111, GR-111a, GR-111pa, GR-116, GR-211, MG-17G, MG-19B, TSB-13P, TSM-11P, TSM-13P, TSR-11P



- × ÷ 1234567890 KC KV KΩ 1234567890 % °C P
 67890 % °C PH + - × ÷ 1234567890 KC KV KΩ 123
 C KV KΩ 1234567890 % °C PH + - × ÷ 123456789
 - × ÷ 1234567890 KC KV KΩ 1234567890 % °C P
 67890 % °C PH + - × ÷ 1234567890 KC KV KΩ 123
 C KV KΩ 1234567890 % °C PH + - × ÷ 123456789
 - × ÷ 1234567890 KC KV KΩ 1234567890 % °C P
 67890 % °C PH + - × ÷ 1234567890 KC KV KΩ 123
 C KV KΩ 1234567890 % °C PH + - × ÷ 123456789
 - × ÷ 1234567890 KC KV KΩ 1234567890 % °C P
 67890 % °C PH + - × ÷ 1234567890 KC KV KΩ 123
 C KV KΩ 1234567890 % °C PH + - × ÷ 123456789
 - × ÷ 1234567890 KC KV KΩ 1234567890 % °C P
 67890 % °C PH + - × ÷ 1234567890 KC KV KΩ 123
 C KV KΩ 1234567890 % °C PH + - × ÷ 123456789



INDICATOR TUBE

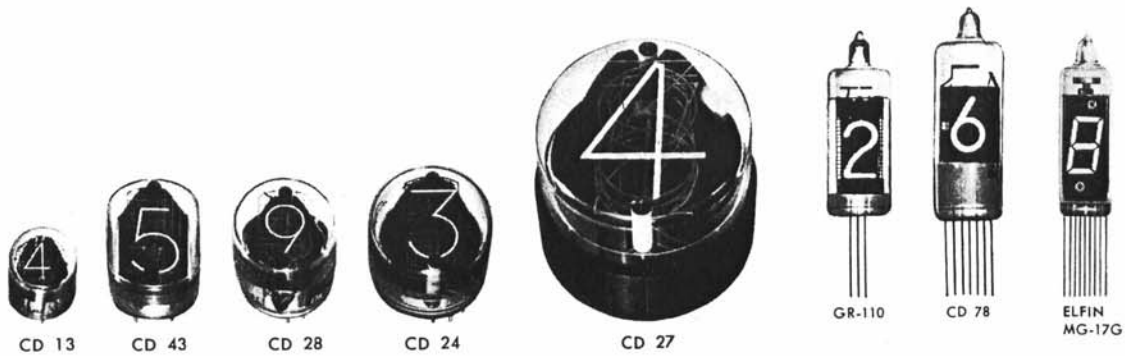

RODAN Indicator Tubes consist of a common anode and individual metallic cathodes which are formed in the shape of numerals (0 - 9) or special symbols such as +, -, %, etc.

RODAN Indicator Tubes are all electronic gas-filled, cold-cathode display devices.

Application of a negative voltage to the selected cathode element with respect to the common anode causes around the element to ionize and glow beautifully in neon red color.

The minimum supply voltage should be 170V DC, however, the use of higher voltage is available with an appropriate series resistor recommended.


Features :

1. High brightness illumination in neon red color.
2. Low cost and power requirement and all electronic design providing high speed operation.
3. Long life and less mounting place of any other readout devices.
4. Bigger size tubes are mechanically reinforced with metallic or plastic shield fitted on its bottom.
5. All DC operation making simple drive circuit possible.
6. Lightest weight and simple mounting.

Switching Systems:

Rotary switches
Electromagnetic relay circuits
Beam switching tubes
Trigger tubes
Transistors
Decatrons

Basic Circuit

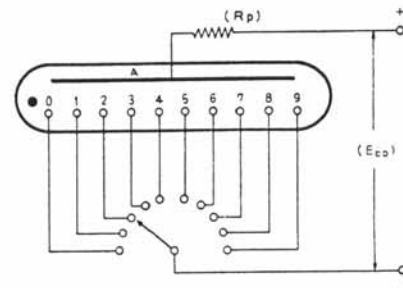

(Rp) : Series Resistor ($k\Omega$)

(Ebb) : Anode Supply Voltage (Vdc)

INDICATOR TUBE



D.C. Operation

	CD 11	CD 12	CD 13	CD 14	CD 15	CD 20	CD 21	CD 22	CD 23	CD 24	CD 25	CD 27	CD 28	CD 38
Indication	0~9	0~9	0~9	+ - × ÷	V, mV kV	Ω, MΩ kΩ	μF, pF	A, mA μA	S, mS μS, Kc	0~9	0~9	0~9	0~9	0~5
Anode Supply Voltage (Vdc) Min.	170	200	170	170	170	170	170	170	170	170	170	200	170	170
Ionization Voltage (Vdc) Max.	170	170	170	170	170	170	170	170	170	170	170	170	170	170
Cathode Current (mA dc)	2.5	5	0.9	2.5	2.5	2.5	2.5	2.5	2.5	2.25	2.5	10	1.8	2.5
Power Consumption per Electrode (W)	0.5	1	0.2	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	2	0.4	0.5
Outline Drawing	A-4	A-7	A-1	A-4	A-4	A-4	A-4	A-4	A-4	A-3	A-6	A-8	A-2	A-4
Dimensions of Socket (Unit mm)	B-5	B-6	B-1	B-5	B-5	B-5	B-5	B-5	B-5	B-4	B-3	B-6	B-2	B-5
Pin Connections	C-1	C-2	C-3	C-4	C-5	C-6	C-7	C-8	C-9	C-10	C-15	C-2	C-11	C-12
Recommended Anode Series Resistor for Supply Voltage (kΩ)														
170 Vo'ts	10		33	10	10	10	10	10	10	10	18		15	10
200 Vo'ts	22	12	65	22	22	22	22	22	22	24	22	5	35	22
250 Vo'ts	42	22	120	42	42	42	42	42	42	47	43	10	65	42
300 Vo'ts	62	32	180	62	62	62	62	62	62	68	62	15	100	62

	CD 40	CD 42	CD 43	CD 47	CD 66	GR-111a	GR-116	GR-110	GR-211	MG-17G	MG-19B
Indication	0~5	0~5	0~9	0~9	0~9, .	0~9, .	0~9, .	0~9, .	0~9	0~9, .	0~9, .
Anode Supply Voltage (Vdc) Min.	200	200	170	250	170	170	175	170	200	180	180
Ionization Voltage (Vdc) Max.	170	170	170	200	170	170	170	170	170	160	160
Cathode Current (mA dc)	5	10	2.25	25	2.25	2.25	3	1.9	5	0.35	0.5
Power Consumption per Electrode (W)	1	2	0.5	5	0.5	0.5	0.5	0.3	1	—	—
Outline Drawing	A-7	A-8	A-5	A-17	A-12	A-11	A-13	A-9	A-16	A-14	A-15
Dimensions of Socket (Unit mm)	B-6	B-6	B-3	B-6	—	—	—	—	—	—	—
Pin Connections	C-13	C-13	C-15	C-2	C-19	C-17	C-22	C-16	C-14	C-20	C-21
Recommended Anode Series Resistor for Supply Voltage (kΩ)							180V	190V			
170 Volts			18		20	20	15	27			
200 Volts	12	5	24		24	24	20	33	12	200* 360**	130* 360**
250 Volts	22	10	47	5.1	47	27		230V 47	22	330* 620**	270* 620**
300 Volts	32	15	68	6.8	68	68			32		

Pulse Operation

(Time Sharing Operation)


	CD 78	GR-110	GR-111pa	GR-116	MG-17G	MG-19B
Indication	0~9, .	0~9, .	0~9, .	0~9, .	0~9, .	0~9, .
Anode Supply Voltage (Vdc) Min.	170	190	190	175	190	190
Ionization Voltage (Vdc) Max.	170	170	170	170	170	170
Cathode Current (mA dc)	7.2	5	5.5	14	1.2	1.5
Power Consumption per Electrode (W)	—	0.1	—	0.3	—	—
Outline Drawing	A-10	A-9	A-11	A-13	A-14	A-15
Dimensions of Socket (Unit mm)	—	—	—	—	—	—
Pin Connections	C-18	C-16	C-17	C-22	C-20	C-21
Recommended Anode Series Resistor for Supply Voltage (kΩ)						
190 Volts	5.6	6.8	5			
200 Volts	210V 7.5	9.1	7	2.5	43* 120**	36* 110**
250 Volts		230V 15	18	235V 5	82* 240**	68* 200**
300 Volts			27			100* 300**

Each cathode is ignited by transistor, reduce value of Rp (or Rk) by 10% ~30% and set Ik to standard value of cathode current (mA DC).


*: (Rk), Characters

** : (Rk), Decimal point


Dimensions of Tubes Electrodes (Charactors) (Unit mm)

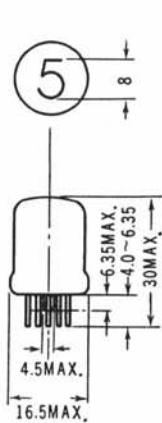


A-1
(CD 13)

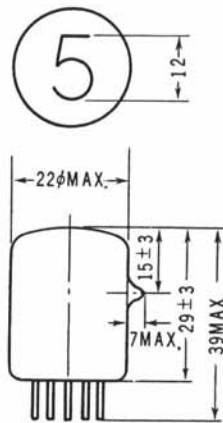


A-2
(CD 28)

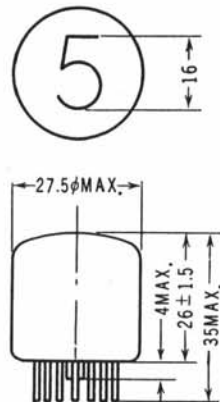


A-3
(CD 24)

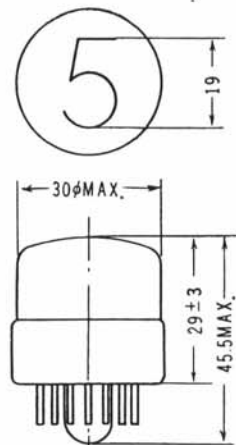


A-4
(CD 11)

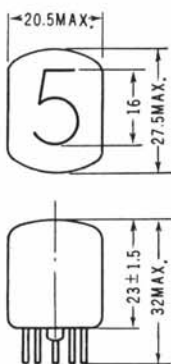


A-5
(CD 43)

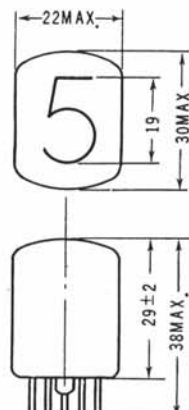

A-6
(CD 25)

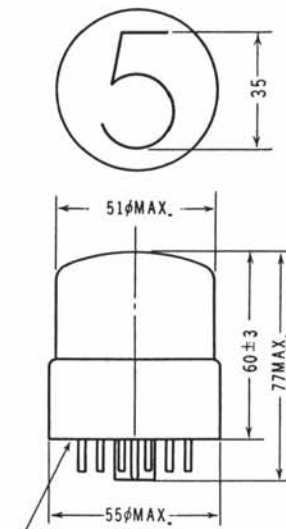


A-7
(CD 12)

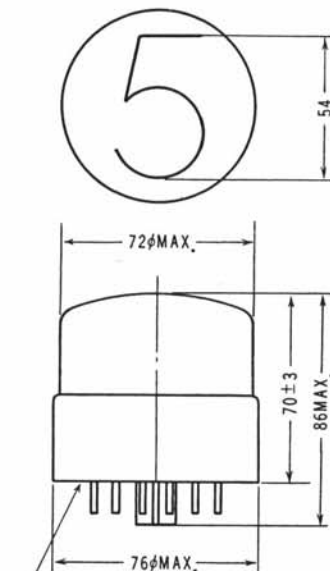


A-8
(CD 27)


Dimensions of Sockets (Unit mm)




B-1
(TSM-11P)



B-2
(TSM-13P)




B-3
(TSR-11P)

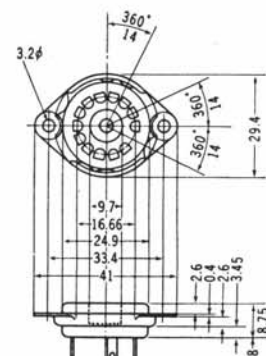


B-4
(TSB-13P)


INDICATOR TUBE

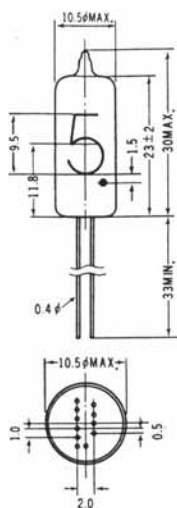


A-9
(GR-110)

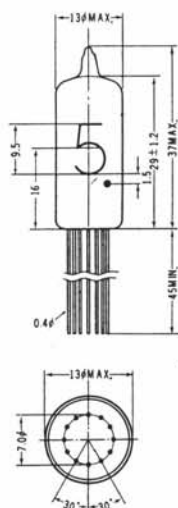


A-10
(CD 78)

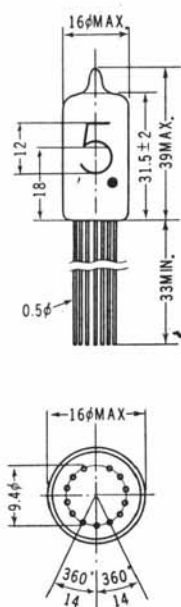


A-11
(GR-111a)

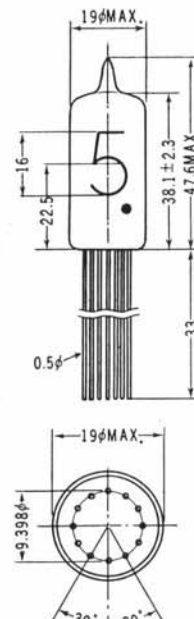


A-12
(CD 66)

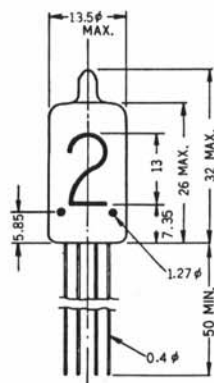


A-13
(GR-116)

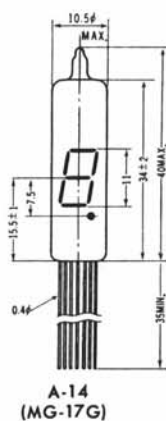



A-14
(MG-17G)

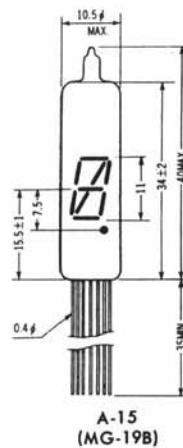


A-15
(MG-19B)

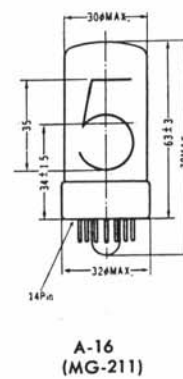


A-16
(MG-211)

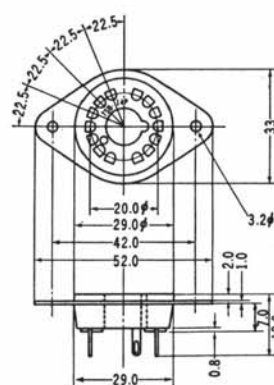

B-5
(TSB-14P)

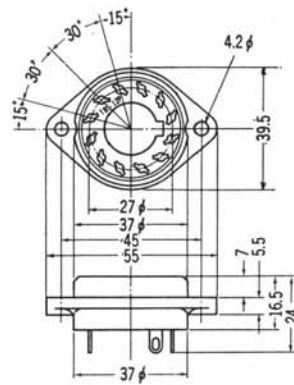


B-6
(TSB-12P)

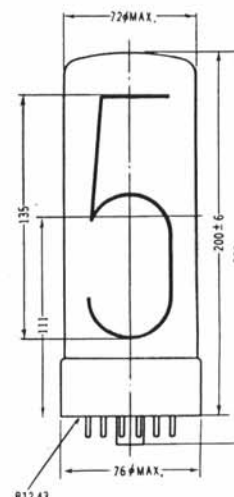


A-17
(CD 47)


Pin Connections




C-1
(CD 11)




C-2
(CD 12, CD 27, CD 47)




C-3
(CD 13)




C-4
(CD 14)




C-5
(CD 15)




C-6
(CD 20)




C-7
(CD 21)




C-8
(CD 22)




C-9
(CD 23)




C-10
(CD 24)




C-11
(CD 28)




C-12
(CD 38)




C-13
(CD 40, CD 42)




C-14
(GR-211)




C-15
(CD 25, CD 43)




C-16
(GR-110)




C-17
(GR-111)




C-18
(CD 78)




C-19
(CD 66)



C-20
(MG-17G)



C-21
(MG-19B)




C-22
(GR-116)

Design details subject to change without notice.

Type	Approximate y
CD 11	200,000 hour
CD 12	500,000 hour
CD 13	100,000 hour
CD 27	500,000 hour
CD 28	150,000 hour
CD 24	200,000 hour

Fig. 1 Estimated life (in hour)

(a) Temperature VS. Anode Current

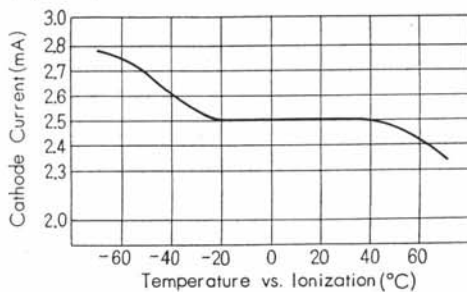

(b) Temperature VS. Anode Voltage

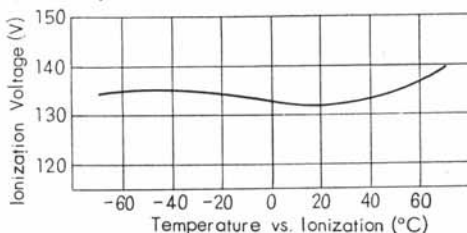


Fig. 2 Temperature Characteristics of the CD11

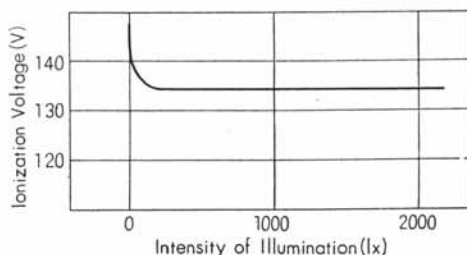


Fig. 3 Intensity of Illumination VS. Ionization Voltage

The spread of positive bias of cathodes of the CD11.

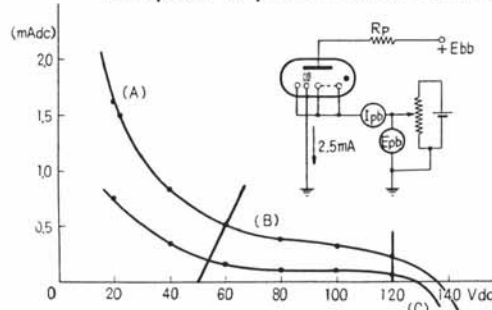


Fig. 4

Life of Indicator Tubes

The life of indicator tubes ends by the disconnection of figure electrodes (cathodes), which is caused mainly by sputtering. In practical use, it depends upon the conditions of each cathode; the characteristics spread, the discharge current, rectifier conditions of the power supply, and the period of usage of each electrode differs greatly from each other even in frequent changeover.

Therefore, the life of each cathode varies widely. Long life indicator tubes are so designed that the sputtering is reduced substantially; therefore, under severe conditions such as continuous indication and frequent changeover, at least 25,000 hours of operation is expected in each cathode of the CD11. If each cathode is switched on and off within a few hours operation, estimated life is more than 200,000 hours. In case of the CD12 and CD27, longer life is expected. (Refer to Table 1.)

CIRCUIT CONDITIONS

Ionization Voltage

Anode supply voltage should be more than ionization voltage. Ionization voltage also depends upon ambient brightness and temperature. So it is necessary to take these factors into consideration in determining the anode supply voltage (Ebb).

A few makers indicate the minimum anode supply voltage. It is recommended to use higher voltages, if circuit design permitting. Excess glow occurs by more than 300V operation, so that it is recommended to select Ebb in the range between 190-290V.

Cathode Current

If the cathode current is too small, clear and sufficient indication of figures is not expected, and contrary, if it is too great, the life is reduced and discharge occurs on lead wires and inner supporting. The area of each figure cathode differs from each other; therefore minimum current for each cathode is not the same. Each maker indicates the standard current according to the characteristics spread and variation of each tube, which vary in a single tube depending upon each figure cathode.

Moreover, recommendable anode series resistance is given in conjunction with anode supply voltage, conform to the specification imposed by each maker in circuit design. (Refer to other characteristics.) The voltage varies linearly with the resistance, therefore, in the use of voltages other than the specified value, calculate the resistance value by the proportional principle.

Temperature Characteristics & Photoelectric Phenomenon

The cathode current and ionization voltage are plotted against temperatures in Fig. 2 (a)-(b), however, at ambient temperatures lower than -30°C , life is reduced by large current. The photoelectric phenomenon data is given in Fig. 3. Delay in ionization time will appear when the indicator tube is operated in dark place.

Other Characteristics

In the fundamental circuitry, each cathode except the ignition electrode is separated, however, when electronic elements such as transistors are used for changeover, each cathode is biased positively. The positive bias characteristics are given in Fig. 4. Select the voltage to use tubes in B region. R_x s are connected to the anode for changeover by resistance variation and improvement of transistor circuits. (Refer to Fig. 5.) Therefore, when rated current flows through the ignition electrode, current flows through R_x s too. The potential drop across the anode resistor (R_p) increases; therefore, R_p should be slightly smaller than the value specified in the fundamental circuit. The Ebb is plotted against the R_p when the cathode current (I_k) is fixed at the standard value and R_x at $1.5\text{ M}\Omega$. Measure the cathode current (I_k) in Fig. 5.

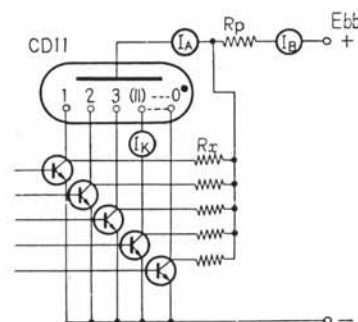


Fig. 5

Table 2. Ebb and R_p in Transistor Control

Type	CD 11		CD 24		CD 28	
I_B and R_p	I_B	R_p	I_B	R_p	I_B	R_p
Ebb Unit	mA	K Ω	mA	K Ω	mA	K Ω
Vdc Condition	$R_x = 1.5M\Omega$	$I_k = 2.5mA$	$R_x = 1.5M\Omega$	$I_k = 2.25mA$	$I_k = 1.8mA$	$I_k = 1.8mA$
1 7 0	3.5	7	3.3	7	2.8	10
2 0 0	3.5	16	3.2	17	2.8	20
2 5 0	3.5	30	3.2	30	2.8	40
3 0 0	3.5	45	3.2	45	2.8	60

NOTE: 1. 2SD-134 Transistors are used. 2. The circuit shown in Fig. 5 should be used.

APPLICATIONS OF INDICATOR TUBES

Fundamental applications are as follows.

A. MECHANICAL METHODS

(1) Changeover Switch Control

The fundamental circuit shown in first page is used without modification as a simple indicator circuit. They are used in channel indicating devices when the changeover switch is operated synchronously with other changeover switches fitted in other circuits. (Refer to Fig. 6).

(2) Relay Selection Circuit

Relays are arranged in a tree branch fashion. The lighting of a specified figure is attainable by the combination of on and off states of relays which are arranged in 4 rows and operated selectively. This circuitry is binary coded decimal notation conversion by relays and discontinuous equilibrium type. This method is also adopted in digital voltmeters.

B. THE METHOD BY SEMICONDUCTORS AND ELECTRONIC TUBES

(1) Control by Transistors

NPN-type transistors are connected to the cathodes of a discharge tube as shown in Fig. 8. The transistors are in the OFF-state normally by biasing their bases with negative potential ($V_B - 1 \sim -4$ volts). Positive potential is applied to a single transistor to render it in the ON-state by a specifying signal, thus, discharge is controlled. It is desirable to use transistors whose collector-emitter breakdown voltage (V_{ce}) is higher than 80 volts.

(2) The Method for Providing Counting Function

The circuit of the all-transistor unit with IC is shown in Fig. 9. The unit is compact and power consumption is small with high practicability and low price. The units are available under the model name PU-1002 and PU-1005.




Fig. 6




Fig. 7

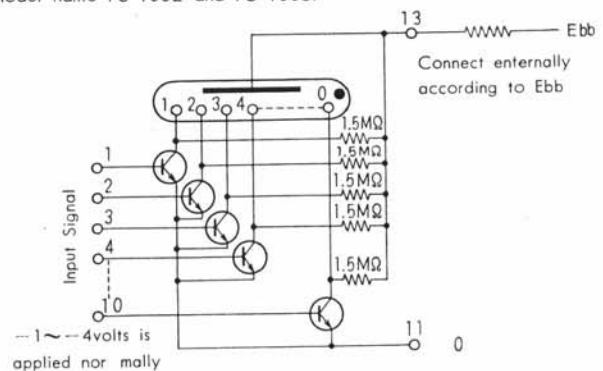


Fig. 8